

POWER SENSORS

RF Directional Thruline

4028 SERIES



High Accuracy for Precision High Power Applications

The Bird 4028 Series RF Directional Thruline Power Sensors are designed specifically for use in high power LCD, TFT and Solar processing as well as other precision high power applications. Because accuracy is critical, these sensors are capable of $\pm 2\%$ accuracy at the calibrated frequency and power level which can improve accuracy and long-term repeatability for significant improvements on your process yields. Multiple sensor models are available for measurement applications from 1 kW to 25 kW to over a 250 kHz to 30 MHz frequency range. Calibration is traceable to the National Institute of Standards and Technology (NIST), providing additional confidence in sensor measurement.

$\pm 2\%$ Accuracy, Precision
Directional RF Power Sensors

PRODUCT FEATURES

- Specifically designed for use in high power LCD, TFT and Solar processing and other precision high power applications up to 50 kW
- $\pm 2\%$ accuracy at specified frequencies and power levels minimizing poor production yields
- Models do not need to be field calibrated before use and only need to be calibrated once every year
- Plug and Play with the 4421A Series Multifunction Power Meter
- Dozens of connector options available
- Calibration traceable to the National Institute of Standards and Technology

FOR USE WITH

- 4421A Multifunction Power Meters
- SCC8 Calibration Cart

MEASUREMENT

Accuracy	±2% at calibration frequencies and power levels ±3% at other frequency and power levels Add 2% to uncertainty outside 25 ± 10 °C
Accuracy, Rfl	Calculated from Fwd accuracy + (Fwd Power/10 [^] {directivity/10})
Accuracy, VSWR	Calculated from Fwd and Rfl power (VSWR = [1+√(Pr/Pf)] / [1-√(Pr/Pf)])
VSWR, Max	1.05:1
Max Allowable Terminating VSWR	2.00:1
Directivity, Min	28 dB
Insertion Loss, Max	0.05 dB (with female 7/16 DIN connectors)
Impedance, Nominal	50 Ohms
Speed	2 readings per second
Repeatability, multiple measurements, single sensor	± 0.3% (95% c.l.) (with female 7/16 DIN connectors)
Calibration Power Level	1.7 kW

CONNECTORS

RF Connectors	
A Series	Customer specified
B Series	1 5/8 in EIA Flanged
C Series	3 1/8 in Flanged (for sensors with frequencies of 2 MHz and above)"
Sensor Interface	Latch-n-Lock

SYSTEM

Recommended Calibration Interval	1 year
Power Supply	Supplied by power meter via sensor cable

ENVIRONMENTAL

Operating Temperature	0 °C to 50 °C (32 °F to 122 °F)
Storage Temperature	-20 °C to 70 °C (-4 °F to 158 °F)
Humidity	95% max (non-condensing)
Altitude	10,000 ft (3,000 m)

PHYSICAL

Size, Nom	
A Series (w/o connectors)	4.7 in x 3.2 in x 3.8 in (120 mm x 82 mm x 97 mm)
B Series	6.8 in x 3.5 in x 4.8 in (171 mm x 89 mm x 121 mm)
C Series	8.0 in x 5.2 in x 6.4 in (203 mm x 131 mm x 162 mm)
Weight, Nom	
A Series	1.7 lb (0.8 kg)
B Series	3.3 lb (1.5 kg)
C Series	7.3 lb (3.3 kg)

CERTIFICATIONS

EMC	Designed to carry CE mark
------------	---------------------------

PRODUCT SELECTION GUIDE

Model	Freq Range	Power Range	Calibration Frequency, Typical	Calibration Power, Typical	Accuracy*	Accuracy, Outside Calibration* Power and Frequency
4028A250K	250 to 400 kHz	1.0 to 20 kW	250, 400 kHz	1.7 kW	± 2.0% (2 σ)	± 3.0% (2 σ)
4028A400K	400 to 550 kHz	1.0 to 20 kW	400 kHz	1.7 kW	± 2.0% (2 σ)	± 3.0% (2 σ)
4028A2M	1.5 to 2.5 MHz	1.0 to 25 kW	1.8, 2.0, 2.17 MHz	1.7 kW	± 2.0% (2 σ)	± 3.0% (2 σ)
4028A3M	2.5 to 3.5 MHz	1.0 to 25 kW	2.5, 3.2, 3.5 MHz	1.7 kW	± 2.0% (2 σ)	± 3.0% (2 σ)
4028A4M	3.5 to 4.5 MHz	1.0 to 25 kW	3.5, 4.0 MHz	1.7 kW	± 2.0% (2 σ)	± 3.0% (2 σ)
4028A10M	10 to 15 MHz	1.0 to 25 kW	10.0, 13.56, 15.0 MHz	1.7 kW	± 2.0% (2 σ)	± 3.0% (2 σ)
4028A25M	25 to 30 MHz	1.0 to 25 kW	25.76, 27.12, 28.48 MHz	1.7 kW	± 2.0% (2 σ)	± 3.0% (2 σ)
4028B3M	2.5 to 4 MHz	1.0 to 25 kW	2.5, 3.2, 3.5 MHz	1.7 kW	± 2.0% (2 σ)	± 3.0% (2 σ)
4028B10M	10 to 15 MHz	1.0 to 25 kW	10.0, 13.56, 15.0 MHz	1.7 kW	± 2.0% (2 σ)	± 3.0% (2 σ)
4028C10M	10 to 15 MHz	500 W to 50 kW	10.0, 13.56, 15.0 MHz	1.7 kW	± 2.0% (2 σ)	± 3.0% (2 σ)


ORDERING GUIDE FOR 4028A Series

Example: 4028A10M-0102

4028A10M with a N(f) Input Connector and a N(m) Output Connector

Sensor - Input Connector Output Connector

Sensor	Input / Output Connector
4028A250K	01= 4240-062, N(f)
4028A400K	02= 4240-063, N(m)
4028A2M	04= 4240-100, C(f)
4028A3M	11= 4240-096, (1 5/8 fixed)
4028A4M	12= 4240-268, HN(f)
4028A10M	13= 4240-278, HN(f)
4028A25M	14= 4240-344, 7/16(f)
	15= 4240-363, 7/16(m)
	16= 4240-370, SQS(m)
	17= 4240-371, SQS(f)
	18= 4240-372, SQS(m-p)
	19= 4240-376, QRM(f)
	20= 4240-374, QDS-UL(m)
	21= 4240-375, SQS(f-p)
	22= 4240-373, QDS-UL(f)
	23= 4240-377, QRM(m)
	24= 4240-377-2, QRM(f-p)
	25= 4240-378, QRM(m-p)
	26= 4240-376-20, GQL(f)
	27= 4240-377-20, GQL(m)
	28= 4240-376-10, GQM(f)
	29= 4240-377-10, GQM(m)
	30= 4240-208, 1-5/8 Swivel
	34= 4240-031, LC(f)
	35= 4240-025, LC(m)
	36= 4240-002, 7/8
	39= 4240-373-2, QDS(f)
	40= 4240-374-2, QDS(m)

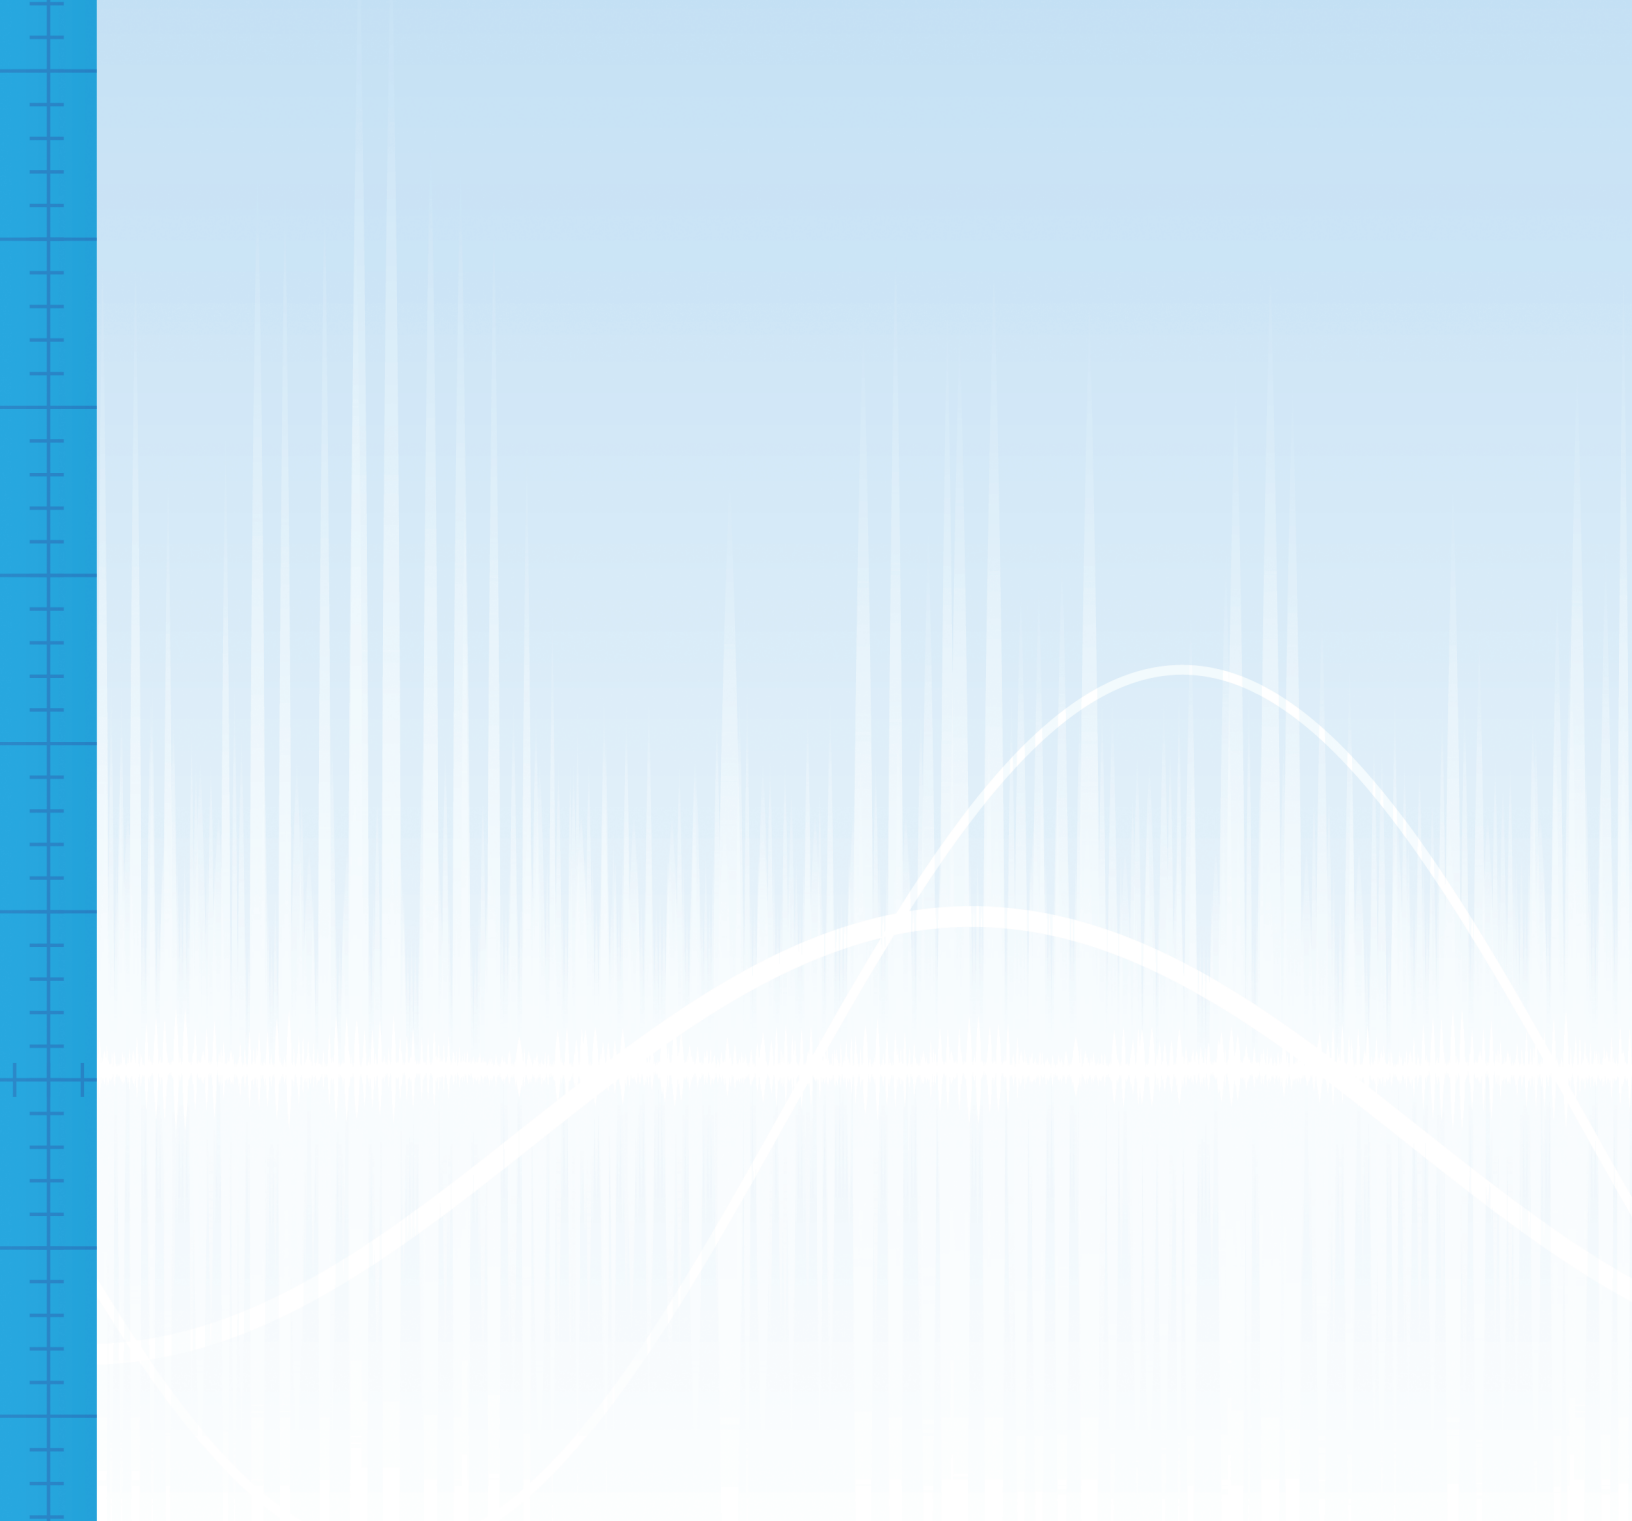

birdrf.com/products

The **RF** Experts | USA Sales : 30303 Aurora Rd, Solon, OH 44139 | www.birdrf.com
Phone: +1 440.248.1200 / 866.695.4569 [Toll Free]

Bird is not responsible for omissions or errors. Specifications subject to change without notice.
©2025 Bird | Precision-RF-Directional-ThruLine-Power-Sensor-4028-Series-03192025

